

# Primary Lithium Battery

## CP352440

3.0V [Li-MnO<sub>2</sub>]



### BENEFITS

- High Voltage Response, Stable During Most of the Lifetime of the Application
- Energy Density up to 830Wh/L
- Wide Operating Temperature Range (-40 °C ~+70 °C)
- Low Self-discharge Rate (less than 1% per year after 1 year of storage at +25 °C)

### KEY FEATURES

- Optimized Battery Structure, Full Discharge Capacity
- Long Endurance
- No Passivation
- GB 8897.4-2008、IEC 60086.4:2014 and RoHS

### MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

### References Data

#### Electrical characteristics

**Open circuit voltage (at 23±2°C)** **≥3.10V**

**Nominal capacity** **650mAh**

(At +25°C, battery discharged at continuous current 5mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

**Maximum continuous current** **300mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity.)

**Maximum pulse discharge current** **500mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult HCB.)

**Storage (recommended)** **≤+30°C**

(For more severe conditions. Consult HCB) **≤75%RH**

**Operating temperature range** **-40°C~+70°C**

(Operation above ambient Temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult HCB.)

### HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park, Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040

Tel: +86(0)27 83248452

Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com

Web: www.cnhcb.com

No.: HCB-MKT.PM-S[V2.0 2018 02]

# Primary Lithium Battery CP352440


3.0V [Li-MnO<sub>2</sub>]

## Physical characteristics

Width (max)	24.0mm
Height (max)	42.0mm
Thickness (max)	3.5mm
Typical weight	6.0g
Li metal content	0.26g

MSDS as per request  
Diode (1N4007, 1N5819)  
PTC (SRS175...)

Tag, wire, connector, etc. available

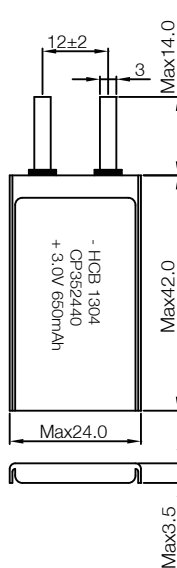


Dimensions in mm (GB1804-m)


## WARNING:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C


1. Typical discharge profiles at 23±2°C  
(at mid-discharge)

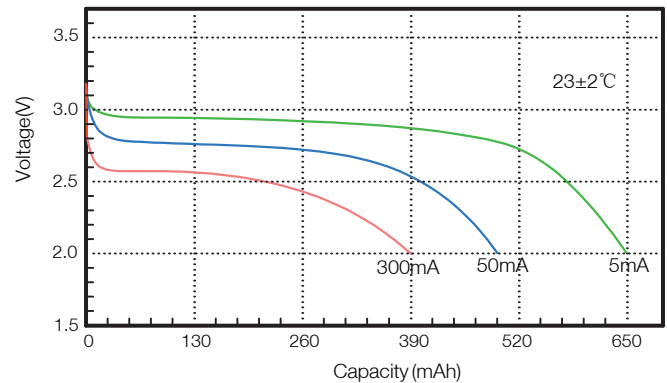

2. Typical discharge profiles with different current  
(at discharge stable phase)

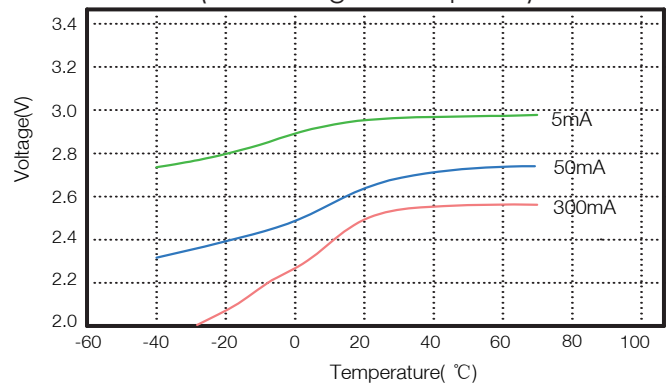

3. Storage characteristics

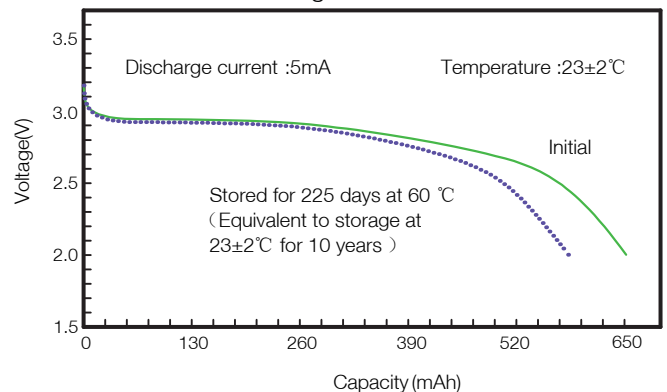

## HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,  
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040  
Tel: +86(0)27 83248452  
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com  
Web: www.cnhcb.com  
No.: HCB-MKT.PM-S[V2.0 2018 02]